
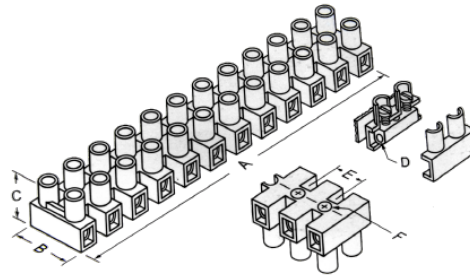


# RCCN 日成PAV0型阻燃端子台 V0 Terminal Blocks

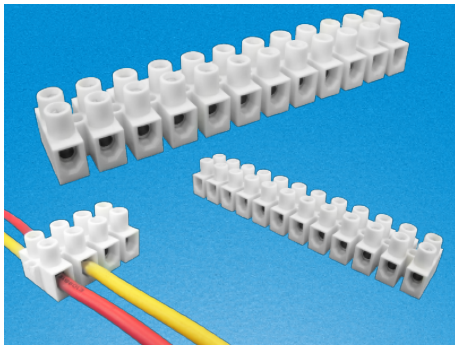

接线组：12对/条 可定制其它孔数  
Terminal blocks：12 pcs/bar

单位/Unit:mm

型号 Item No.	尺寸/Dimension						电线范围 Cable range mm <sup>2</sup>	最大电流 Max. current A	适用电 Suitable voltage V	螺丝 Screw	剥线长度 Split cable length	包装 Packing
	A	B	C	D	E	F						
平底型/Smooth bottom												
PA-1.5V0	96.2	16.3	12.7	2.8	8.2	2.9	1.5	17.5A	450V	M2.6*5	5	50pcs
PA-2.5V0	116.5	20.2	15.8	3.2	10	3.6	2.5	24A	450V	M3*6	6.5	
平底型附弹片/Smooth bottom with shrapnel												
PA-1.5DSV0	96.2	16.3	12.7	2.8	8.2	2.9	1.5	17.5A	450V	M2.6*5	5	50pcs
PA-2.5DSV0	116.5	20.2	15.8	3.2	10	3.6	2.5	24A	450V	M3*6	6.5	
底部垫高型/Higher bottom												
PA-1.5HV0	96.2	17	14.5	2.8	8	2.9	1.5	17.5A	450V	M2.6*5	5	50pcs
PA-2.5HV0	116.5	20.2	16.8	3.4	10	3.6	2.5	24A	450V	M3*6	6.5	
PA-6HV0	141	23.8	19	4.2	12	3.9	6	41A	500V	M3.5*7	7	10pcs
PA-10HV0	158	25.6	25.2	5	13.5	4.4	10	57A	500V	M4*9	9	
PA-16HV0	170	28.1	23	6	14.5	4.2	16	76A	500V	M4*9	9	10pcs
PA-25HV0	194	37	28.7	7.5	16.5	4.2	25	101A	500V	M4*11	11	
底部垫高附弹片/Higher bottom with shrapnel												
PA-1.5HDSV0	96.2	17	14.5	2.8	8	2.9	1.5	17.5A	450V	M2.6*5	5	50pcs
PA-2.5HDSV0	116.2	20.2	16.8	3.4	10	3.6	2.5	24A	450V	M3*6	6.5	
PA-6HDSV0	141	23.8	19	4.2	12	3.9	6	41A	500V	M3.5*7	7	10pcs
PA-10HDSV0	158	25.6	25.2	5	13.5	4.4	10	57A	500V	M4*9	9	

材 质：UL合格之NYLON66(本色),防火等级94V-0,铜镀镍线座制成,螺丝采用碳钢镀锌。工作温度:-30 -110。  
Material: UL approved NYLON66(natural), fireproof 94V-0, nickel coated copper bottom, zinc coated steel screw, Operate T.: -30 -110。

# RCCN 日成KW型电线接线夹 Mid-Way Wire Connector



单位/Unit:mm

型号 Item No.	调用电线范围 Wire combination	包装 Packing
KW-1	18AWG-14AWG	100pcs (1000pcs)
KW-2	18AWG-14AWG	
KW-3	22AWG-18AWG	
KW-4	18AWG-14AWG	
KW-5	12AWG-10AWG	
KW-6	22AWG-20AWG	
KW-6L	18AWG-14AWG	
KW-10	22AWG-18AWG	
KW-11	16AWG-14AWG	
KW-12	12AWG-10AWG	

材 质：UL合格之NYLON66防火等级94V-2。  
本产品具有中途补助接线之用。使用时不须事先剥线，只要选好位置压紧即可。  
Material: UL approved NYLON66,  
Fireproof: 94V-2.

