



RCCN 日成PV型全绝缘母端子 PV Insulated Female Terminals




型号 Item No.	AWG mm ² 包装	尺寸 DIMENSION						
		T×B1 mm	B mm	Dφ mm	dφ mm	L mm	F mm	H mm
PV1.25-187(5)	22-16	0.5×4.75	5.6	3.8	1.7	20.0	6.0	10
PV1.25-187(8)	0.5-1.5	0.8×4.75	5.6	3.8	1.7	20.0	6.0	10
PV1.25-250	1000PCS	0.8×6.35	7.4	3.8	1.7	23.2	7.8	10
PV2-187(5)	16-14	0.5×4.75	5.6	4.0	2.3	20.0	6.0	10
PV2-187(8)	1.5-2.5	0.8×4.75	5.6	4.0	2.3	20.0	6.0	10
PV2-250	1000PCS	0.8×6.35	7.4	4.0	2.3	23.5	7.8	10
PV5.5-250	12-10/ 4-6 500PCS	0.8×6.35	7.4	5.7	3.4	23.5	7.8	13

RCCN 日成MF型钩式绝缘端子 MF Insulated Peggy Back Terminals

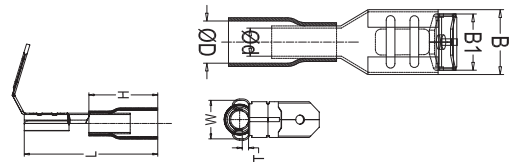

型号 Item No.	AWG mm ² 包装	尺寸 DIMENSION						
		T×W mm	B mm	B1 mm	H mm	Dφ mm	dφ mm	L mm
MF1.25-250	22-16/0.5-1.5 1000PCS	0.8×6.35	7.4	6.3	10.0	3.8	1.7	21.5
MF2-250	16-14/1.5-2.5 1000PCS	0.8×6.35	7.4	6.3	10.0	4.3	2.3	21.5
MF5.5-250	12-10/ 4-6 500PCS	0.8×6.35	7.4	6.3	13.5	5.7	3.4	25.0

RCCN 日成DBF片形绝缘端子 DBF Insulated Terminals

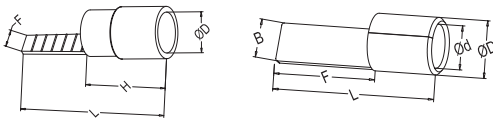

型号 Item No.	AWG mm ² 包装	尺寸 DIMENSION				颜色 Color
		F mm	L mm	H mm	Dφ mm	
DBF1.25-10	22-16 0.5-1.5 1000PCS	2.3	20.0	10.0	4.0	红/Red
DBF1.25-11		3.0	21.0			
DBF1.25-14		3.0	24.0			
DBF1.25-18		2.2	28.0			
DBF2-10	16-14	2.4	19.0	10.0	4.5	蓝/Blue
DBF2-14	1.5-2.5	2.4	24.0			
DBF2-18	1000PCS	2.2	28.0			
DBF5.5-10	12-10	2.8	22.5	13.5	6.4	黄/Yellow
DBF5.5-14	4-6	4.5	26.5			
DBF5.5-18	500PCS	4.5	30.5			

RCCN 日成DBN片形裸端子



型号 Item No.	AWG mm ² 包装	尺寸 DIMENSION				
		B mm	L mm	F mm	Dφ mm	dφ mm
DBN1.25-10	22-16	2.3	14.8	10.0	3.4	1.7
DBN1.25-11	0.5-1.5	3.0	15.8	11.0		
DBN1.25-14	1000PCS	3.0	18.8	14.0		
DBN1.25-18		2.3	22.8	18.0		
DBN2-9	16-14/1.5-2.5	2.3	13.8	9.0	4.1	2.3
DBN2-18	1000PCS	2.3	22.8	18.0		
DBN5.5-10	12-10	2.8	14.8	10.0	5.6	3.4
DBN5.5-14	4-6	4.5	21.0	14.0		
DBN5.5-18	500PCS	4.5	23.0	18.0		
DBN8-14		5.0	22.5	14.0	7.2	4.5
DBN14-16		6.0	30.6	16.0	9.0	6.5